Patented Lid Lifter System

Double Wall Construction

Multi Zone Control

Heavy Duty Floor Element

Swing Open Control Panel

Cone Art BX2822D

The Cone Art BX2822D will easily fire to cone 10. With a 28" interior diameter this kiln is suited for 26" diameter shelves, and just like the BX2322D is a little easier to reach the bottom than with standard depth kilns. 3 thermocouples and our double wall construction results in energy efficiency, and our standard element in the floor helps to ensure even firings every time. Just like the deeper models, this kiln easily disassembles into 3 sections for easy delivery. Combining our patented lid lifter with the 22.5" depth make this an ideal production kiln for baby boomers. The kiln is big enough to hold a large load while being easy on your back.

- 8.33 Cubic Feet
- 28" wide X 22.5" deep
- Double Wall Insulation
- Kanthal A-1 Elements
- 208 or 240 Volts
- 70 or 80 Amp Breaker required
- 3 Zone Bartlett Controller at NO EXTRA CHARGE
- New Lid Lifter at NO EXTRA CHARGE
- CSA approved

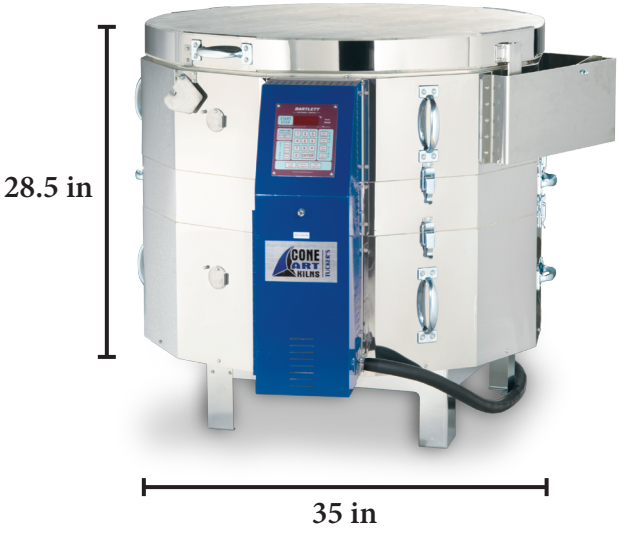

BX2822D

MODEL	WALL	PHASE	VOLT	INSIDE W x H Dim. in inches	SECTION(S)	CUBIC FEET	AMPS	KILO WATTS	SHIP WT. LBS.
BX2822	D	1	240	28 X 22.5	3	8.33	63	15.1	370
BX2822	D	1	208	28 X 22.5	3	8.33	72.5	15.1	370

* Bartlett Controller included on all models.

D: Double Wall

Cone Art Kilns Inc.,
15 West Pearce Street, #7, Richmond Hill, Ontario L4B 1H6
Tel: 905.889.7705 Fax: 905.889.7707 Toll Free: 1.800.304.6185
www.coneartkilns.com