




PRODUCT SPECIFICATION: KM-1022-3 208V/3PH



DIMENSIONS

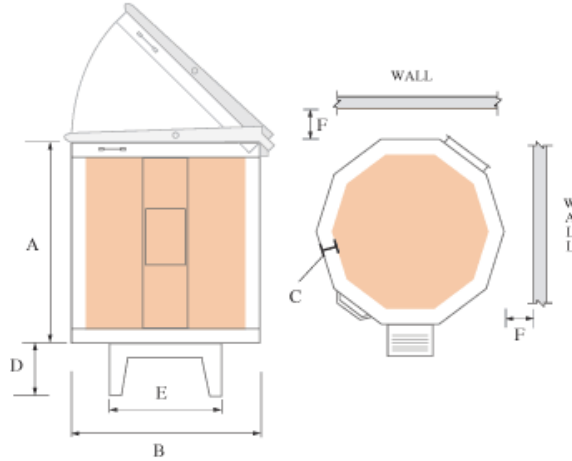

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
KM-1022-3 208V/3PH	3	208	10	2350	22	22.00	5.25	28	28	3	8	17	18	34.6	9984	8	15-50	16940

OPTIONAL ACCESORIES

	Optional
1018, 1022 FURNITURE KIT	Optional
1027 ROLLING KILN STAND	Optional
EASY VIEW	Optional
ENVIROLINK	Optional
ENVIROVENT 2	Optional
ENVIROVENT 2 EXTENSION KIT	Optional

CONTROLLER

Thermocouple: Type K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 0 AMP



Print this page