




PRODUCT SPECIFICATION: KM-1022-3 240V/3PH



DIMENSIONS

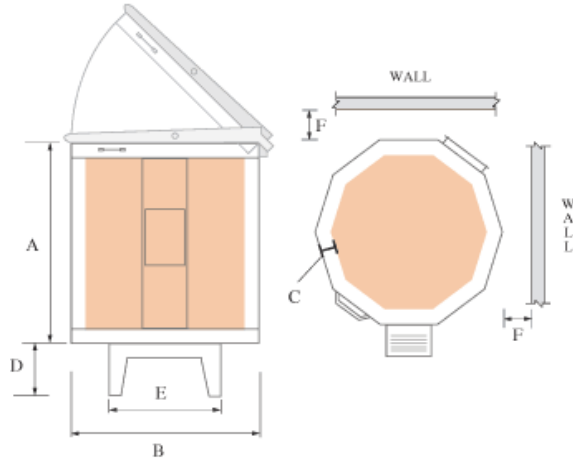

SPECIFICATIONS & DIMENSIONS

| MODEL | Phase | Volts | Maximum | | Chamber | | | O.D.Dimension | | | | | | Power | | Copper Wire Size | NEMA Recp. Conf. | BTU's |
|-----------------------|-------|-------|---------|------|---------|---------------|--------|---------------|----|---|---|----|----|-------|-------|------------------|------------------|-------|
| | | | Cone | Temp | Depth | Opening Width | Cu.Ft. | A | B | C | D | E | F | Amps | Watts | | | |
| KM-1022-3 240V/3PH | 3 | 240 | 10 | 2350 | 22 | 22.00 | 5.25 | 28 | 28 | 3 | 8 | 17 | 18 | 34.6 | 11520 | 8 | 15-50 | 16940 |
| | | | | | | | | | | | | | | | | | | |

OPTIONAL ACCESORIES

| | |
|----------------------------|----------|
| | Optional |
| 818 ROLLING KILN STAND | Optional |
| 818, 822 FURNITURE KIT | Optional |
| EASY VIEW | Optional |
| ENVIROLINK | Optional |
| ENVIROVENT 2 | Optional |
| ENVIROVENT 2 EXTENSION KIT | Optional |

CONTROLLER

Thermocouple: Type K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 0 AMP



Print this page