




PRODUCT SPECIFICATION: KM-1027 208V/3PH

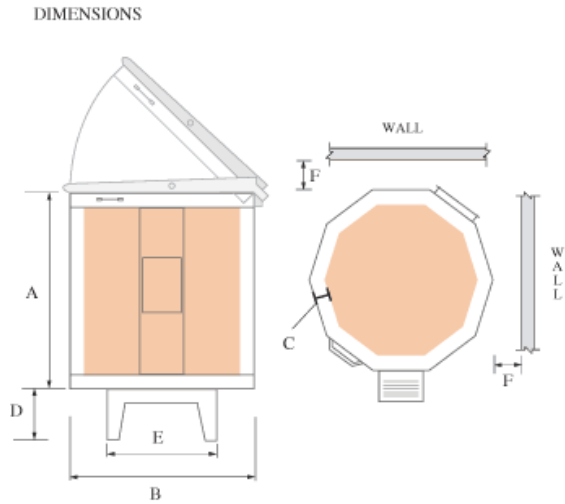

SPECIFICATIONS & DIMENSIONS

| MODEL | Phase | Volts | Maximum | | Chamber | | | O.D.Dimension | | | | | | Power | | Copper Wire Size | NEMA Recp. Conf. | BTU's |
|---------------------|-------|-------|---------|------|---------|---------------|--------|---------------|------|-----|---|----|----|-------|-------|------------------|------------------|-------|
| | | | Cone | Temp | Depth | Opening Width | Cu.Ft. | A | B | C | D | E | F | Amps | Watts | | | |
| KM-1027 208V/3PH | 3 | 208 | 10 | 2350 | 27 | 23.00 | 7 | 32 | 28.5 | 2.5 | 8 | 17 | 18 | 31.7 | 11000 | 8 | 15-50 | 22000 |
| | | | | | | | | | | | | | | | | | | |

OPTIONAL ACCESSORIES

| | |
|-----------------------------------|----------|
| | Optional |
| 1027 FURNITURE KIT | Optional |
| 1027 ROLLING KILN STAND | Optional |
| EASY VIEW | Optional |
| ENVIROLINK | Optional |
| ENVIROVENT 2 | Optional |
| ENVIROVENT 2 EXTENSION KIT | Optional |
| LID LIFTER KIT FOR 10 SIDED KILNS | Optional |
| APM ELEM UPGRADE (ZC)/#1457,1461 | Optional |

CONTROLLER

Thermocouple: Type K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 2 AMP



Print this page