




PRODUCT SPECIFICATION: KM-1231PK/240V 3PH LL

DIMENSIONS

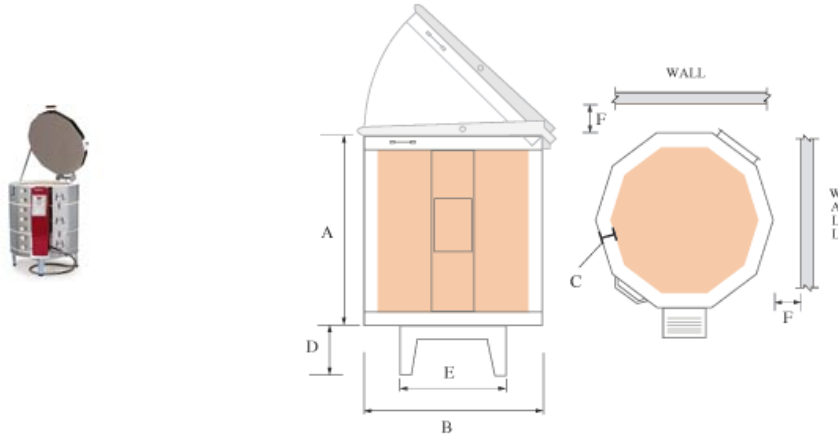

SPECIFICATIONS & DIMENSIONS


MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
KM-1231PK/240V 3PH LL	3	240	10	2350	31	28.00	11.6	37	34	3	8	17	18	44.5	17300	6	Direct Wire	25800

OPTIONAL ACCESORIES

	Optional
1227 FURNITURE KIT	Optional
1227 ROLLING KILN STAND	Optional
EASY VIEW	Optional
ENVIROLINK	Optional
ENVIROVENT 2	Optional
ENVIROVENT 2 EXTENSION KIT	Optional
LID LIFTER KIT FOR 12 SIDED KILNS	Optional
APM ELEMENT UPGRADE FOR #1579	Optional
ZONE CONTROL UPGRADE	Optional

CONTROLLER

Thermocouple: Type K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 2 AMP



Print this page