




PRODUCT SPECIFICATION: KM-1627PK/208V 3PH



DIMENSIONS

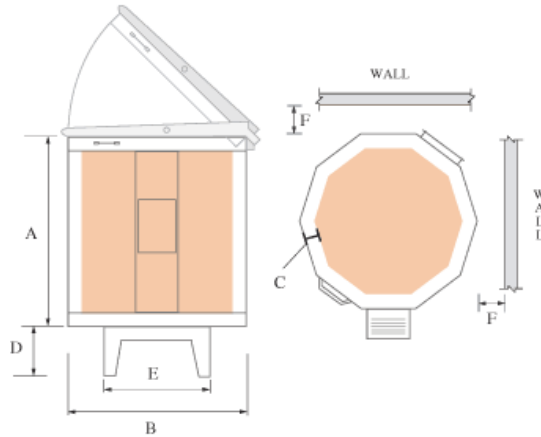

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts			
KM-1627PK/208V 3PH	3	208	10	2350	27	46.00	18.5	33	52 x 36	3	8	17	18	76	23600	3	Direct Wire	34600

OPTIONAL ACCESSORIES

	Optional
1627 ROLLING STAND	Optional
EASY VIEW	Optional
ENVIROLINK	Optional
ENVIROVENT 2	Optional
ENVIROVENT 2 DUAL EXHAUST KIT	Optional
ENVIROVENT 2 EXTENSION KIT	Optional
KM-1627 FURNITURE KIT	Optional
APM ELEM UPGRADE FOR #1590, 1578	Optional
KM-1627PK/208V 1&3PH APM T&B ELE	Optional
TYPE S THERMOCOUPLE UPGRADE	Optional
ZONE CONTROL UPGRADE	Optional

CONTROLLER

Thermocouple: Type K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 2 AMP

