




# PRODUCT SPECIFICATION: KM-1627PK/208V LF (Low Fire)



DIMENSIONS

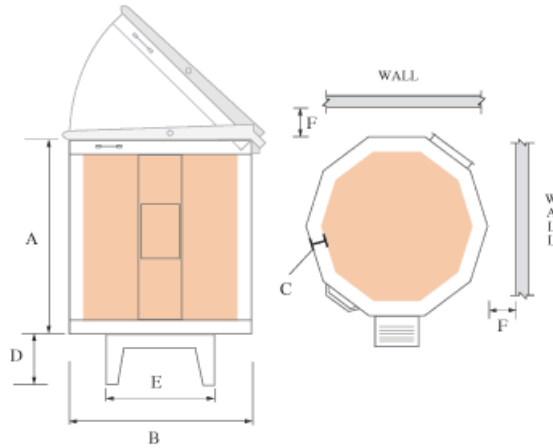

SPECIFICATIONS & DIMENSIONS

MODEL	Phase	Volts	Maximum		Chamber			O.D.Dimension						Power		Copper Wire Size	NEMA Recp. Conf.	BTU's	
			Cone	Temp	Depth	Opening Width	Cu.Ft.	A	B	C	D	E	F	Amps	Watts				
KM-1627PK/208V LF (Low Fire)	1	208	1	2100	27	46.00	18.5								69	14300	3	Direct Wire	

OPTIONAL ACCESSORIES

	Optional
1627 ROLLING STAND	Optional
EASY VIEW	Optional
ENVIROLINK	Optional
ENVIROVENT 2	Optional
ENVIROVENT 2 DUAL EXHAUST KIT	Optional
ENVIROVENT 2 EXTENSION KIT	Optional
KM-1627 FURNITURE KIT	Optional
KM1627PKLF/208V 1&3PH APM T&B EL	Optional

CONTROLLER

Thermocouple:  
 Clock: 60 Mhz  
 Voltage: DC Relays  
 Output: Volts DC  
 Fuse: AMP

